




TS1501 Wireless Alphanumeric LED Display

The TS1501 is a wireless alphanumeric LED display that provides easy time and message viewing to accommodate a wide variety of application environments. Each TS1501 wireless display is assigned a unique ID code to receive its own addressable messages. The TS1501 can also be assigned additional codes to receive group messages with other LED displays.

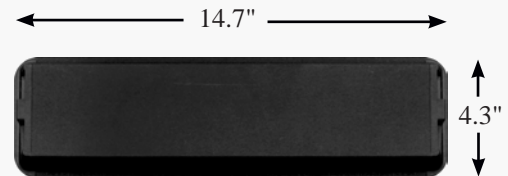

Specifications:

Dimensions:	14.7"L x 4.3"H x 1.5"D	LED size & color:	2.1" Red
Weight:	1.80 lb.	Frequency:	148-174Mhz, 400-470MHz
Power:	120VAC, 60Hz 30-Watt 5V / 3A Power Adaptor	Paging format:	POCSAG, Narrow band
Operating Temperature:	32° to 120°F	Data Baud rate:	512 or 1200 BPS
Humidity:	0%-95% Non-condensing	Receiver Sensitivity:	10uV/M
Frame and lens:	Black metal frame with clear acrylic lens	Channel spacing	12.5KHz
Viewing distance:	Up to 80 feet	Paging addresses:	Six capcodes
Data format:	One line - up to 8 characters	Limited Warranty	One-year Parts and Labor